

KUSEC 15 KV AC FOR CONTACT WIRE BC (EN 50149)

Item number B1569-02

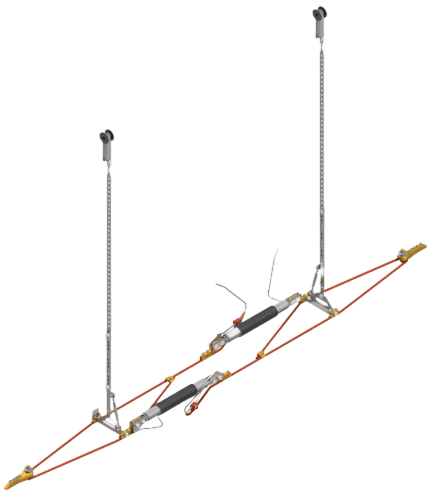

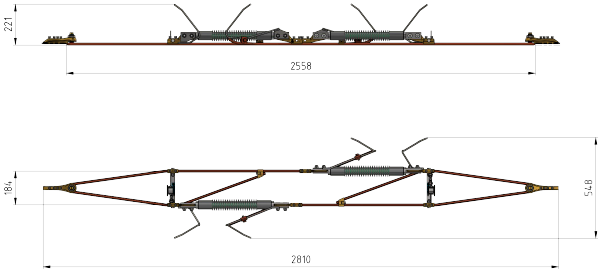

Dimensions

Height: 224 mm
Length: 2810 mm
Width: 184 mm
Length of suspension: 1380 mm
Length between the contact wire: 2555 mm
Packaging: 2600 x 620 x 370 mm

Material and weight

Weight: 19 kg
Material: INOX / CuNi2Si / fibreglass reinforced plastic (FRP) / CuMg0.5 / SI / ST (hot-dip galvanised steel)

Loads

Recommended service load: 8 - 18 kN
Breaking load: Min. 55 kN

Applicable standards

EN 50119, IEC 60913

Function

For the electrical separation of adjacent contact line sections, with simultaneous mechanical connection. Sector contact is continuously guaranteed and there is no interruption of power. Low installation and maintenance effort thanks to an innovative installation concept; very long maintenance intervals thanks to flexible lightweight design. The section insulator's flexible design allows it to be used for high speeds of up to 250 km/h.

Specification

Short-circuit current: 40000 A
Contact wire cross-section: max. 150 mm²
Kerf width: 6.9 mm
Creepage distance: 830 mm
Arcing horn distance: 140 mm
Operating voltage: 15 kV AC

Comments

- Product can be individualised for various contact wire types

Downloads

https://www.kummlermatter.ch/en/offers/downloads

Kummler+Matter AG
Rietstrasse 14
8108 Dällikon

Tel. +41 44 247 47 47
info@kummlermatter.ch
kummlermatter.ch

Kummler+Matter
A COLAS RAIL COMPANY